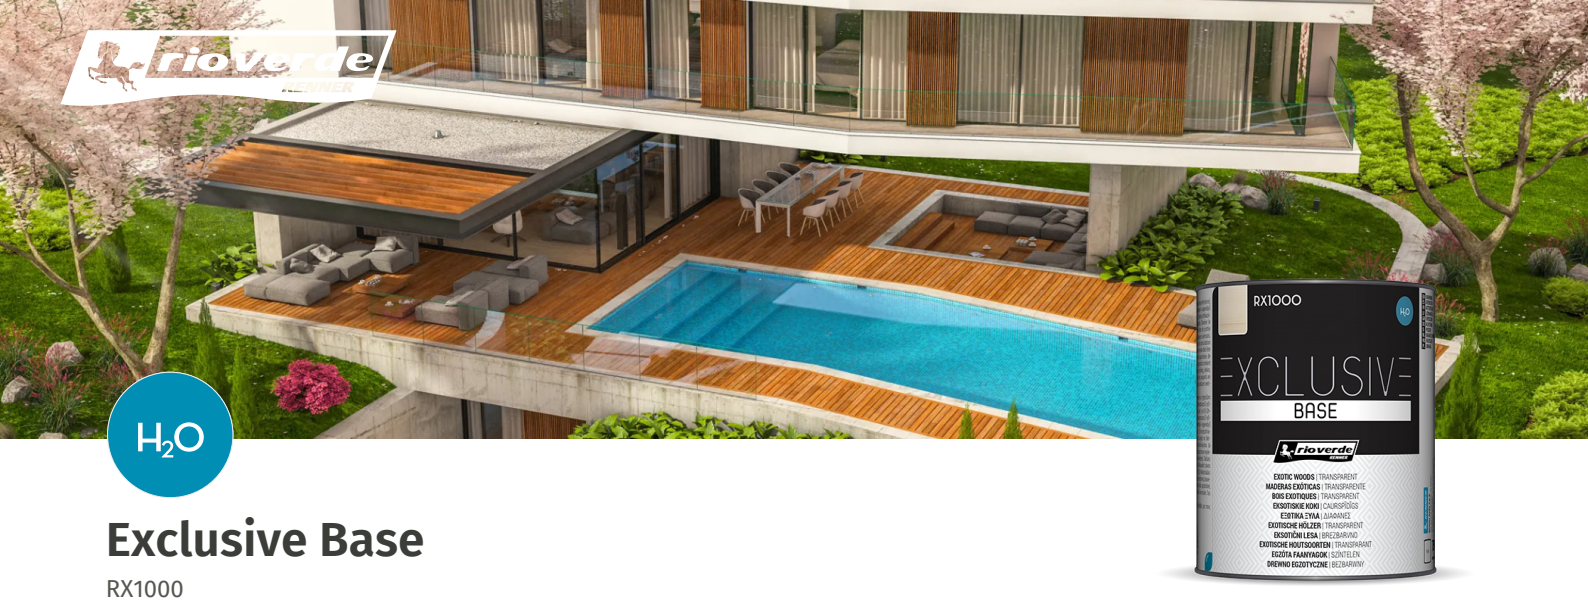


Exclusive Base

RX1000

Formulation	Water-based
What it is used for	Coating
Where to use it	Outdoors, Indoors
On which object	Furniture, Fences and enclosures, Frames and skirting boards, Windows and shutters, Gazebos, garden houses and doghouses, Garden furniture, Watercrafts, Indoor floorings, Floorings and poolsides, Doors, Front doors and entry doors, Claddings, Claddings and boiserie, Outdoor beams, Indoor beams
Material	Wood
Final result	Visible wood grain

Safety information

UFI

RX1000

UFI: **E3PN-80GH-D00U-047F**

Warning. May cause an allergic skin reaction. Harmful to aquatic life with long lasting effects. **Contains:** reaction mass of α-3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyl-ω-hydroxypoly(oxyethylene) and α-3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyl-ω-3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyloxypoly(oxyethylene); 2-methyl-4-isothiazolin-3-one; reaction mass of bis(1,2,2,6,6-pentamethyl-4-piperidyl) sebacate and methyl 1,2,2,6,6-pentamethyl-4-piperidyl sebacate; 1,2-benzisothiazol-3-(2h)-one; 3-iodo-2-propynyl butylcarbamate. Wear protective gloves. Dispose of contents/container in accordance with regulation in force. Keep out of reach of children. Avoid breathing dust/fume/gas/mist/vapours/spray. If skin irritation or rash occurs: Get medical advice/attention. If medical advice is needed, have product container or label at hand. The empty container must be delivered closed, with the original cap, to a recycling center. Check the dispositions of your municipality. EU limit value for this product (cat. A/e): 130 g/l. Maximum VOC content for this product 40 g/l.

Fields of application

Exterior floors, deckings, jetties, pool sides, railings.

Information

Priming treatment for exotic wood floorings to be coated with Exclusive 1 and 2. Also suitable for vertical surfaces. It nourishes

Copyright © 2026 Renner Italia S.p.A

hardwoods and filters out solar radiation.

Instructions

Raw wood. Sand the support with 150 grit sandpaper, clean the surface from the sanding powder and apply 1-2 coats of product. ***Stained/impregnated wood.*** It is possible to apply RX1000 on a wood treated with low-solid content dyes or wood stains. Once the surface has been cleaned, sand with sandpaper or scotch brite. Then remove the powder and apply 1-2 coats of product. ***Coated wood.*** Sand with 80-150 grit sandpaper and bring the wood back to the raw condition. Clean the surface and apply 1-2 coats of product.

Overcoating

Exclusive 1 RX50xx, Exclusive 2 RX20xx, Floor Prestige RB2x70.

Packaging

750 ml

Quick info

Storage 5 °C	Drying time between coats 2-3 hours	Mix it well before use	Specific weight 1.01 ± 0.03 g/cm³	8.5 ± 1.0	Ready to use
Yield 12–20 m²/L	Solid content 15 ± 2 %	Overcoating 3-4 hours	Painting 10 °C	Brush Spray gun Roller	

Available colours

RX1000
Transparent

Copyright © 2026 Renner Italia S.p.A